

TRANSMITTAL LETTER TO THE UNITED STATES  
 DESIGNATED/ELECTED OFFICE (DO/EO/US)  
 CONCERNING A FILING UNDER 35 U.S.C. 371

19378.0012

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/868988

INTERNATIONAL APPLICATION NO.	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED
PCT/SE99/02268	6 December 1999	23 December 1998

TITLE OF INVENTION

CONTROL ROD

APPLICANT(S) FOR DO/EO/US

Örjan Bernander and Sture Helmersson

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. § 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as **published** (35 U.S.C. 371(c)(2)) **WO 00/39808**
  - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the Annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. Below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.  
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter
16. ☒ Other items or information:

PCT/ISA/210  
 PCT/IPEA/401  
 PCT/IPEA/409  
 PCT/RO/101

09663988-110801

09/868988

X The following fees are submitted:

CALCULATIONS

PTO USE ONLY

**Basic National Fee (37 CFR 1.492(a)(1)-(5)):**

Search Report has been prepared by the EPO or JPO.....\$860.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) .....\$690.00

No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....\$760.00

Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$1,000.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4).....\$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT = \$1,000.00**Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☒ 30 months from the earliest claimed priority date (37 CFR 1.492(e)).

\$ 130.00

Claims	Number Filed	Number	Rate
Total Claims	12 - 20 =	0	X \$18.00
Independent Claims	1 - 3 =	0	X \$80.00
Multiple dependent claim(s)(if applicable)			+ \$270.00

**TOTAL OF ABOVE CALCULATIONS = \$1,130.00**

Reduction by 1/2 for filing by small entity, if applicable.

\$

**SUBTOTAL = \$1,130.00**Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

**TOTAL NATIONAL FEE = \$1,130.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$

**TOTAL FEES ENCLOSED = \$1,130.00**Amount to be:  
Refunded \$

Charged \$1,130.00

a. ☐ A check in the amount of \$\_\_\_ to cover the above fees is enclosed.b. ☒ Please charge my Deposit Account No. **19-5127; 19378.0012** in the amount of \$1,130.00 to cover the above fees.  
A duplicate copy of this sheet is enclosed.c. ☒ The Director is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **19-5127**. A duplicate copy of this sheet is enclosed.**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status**SEND ALL CORRESPONDENCE TO:****Edward A. Pennington**  
**Swidler Berlin Shereff Friedman, LLP**  
**3000 K Street, N.W., Suite 300**  
**Washington, DC 20007-5116**

SIGNATURE

Eric J. Franklin

NAME

37,134

REGISTRATION NUMBER

09/868988

Atty Docket: 19378.0012

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: :  
:   
Örjan Bernander et al. :  
:   
Application No.: -- U.S. National Phase : Examiner: --  
of PCT/SE99/02268 :   
:   
Filed: June 22, 2001 : Art Unit --  
:   
Title: CONTROL ROD

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, DC 20231

Sir:

Prior to examination, please amend the above-identification as follows:

**In the Claims:**

Please amend the claims as follows:

**Clean Copy of Amended Claims**

3. A control rod according to claim 1, **characterized** in that said inner part in at least some portion constitutes at least one-third of the width of the absorber blade.
4. A control rod according to claim 1, **characterized** in that a plurality of recesses (17, 17a, 17b, 17c, 18) are arranged in said inner part of the absorber blade.
6. A control rod according to claim 1, **characterized** in that the absorber blades comprise a plurality of radially arranged channels (13, 14) in which the absorber material is arranged,

whereby at least the majority of the channels (13) in the upper part (15) are shorter than the channels (14) in the lower part (16) of the absorber blades.

8. A control rod according to claim 1, **characterized** in that the absorber blades (6, 7, 8, 9) comprise a plurality of channels (22, 23, 24), arranged axially in relation to the control rod, in which the absorber material is arranged, whereby at least the majority of the channels (22) are arranged radially outside one or more channels (23, 24) which are arranged nearest the cruciform centre (10).

11. A control rod according to claim 1, **characterized** in that the absorber material consists of boron and/or hafnium.

12. A control rod according to claim 1, **characterized** in that the absorber material consists of boron carbide and/or hafnium metal.

#### Claim Amendments

3. (Amended) A control rod according to claim 1 [or 2], **characterized** in that said inner part in at least some portion constitutes at least one-third of the width of the absorber blade.

4. (Amended) A control rod according to [any of the preceding claims] claim 1, **characterized** in that a plurality of recesses (17, 17a, 17b, 17c, 18) are arranged in said inner part of the absorber blade.

6. (Amended) A control rod according to [any of the preceding claims] claim 1, **characterized** in that the absorber blades comprise a plurality of radially arranged channels (13, 14) in which the absorber material is arranged, whereby at least the majority of the channels (13) in the upper part (15) are shorter than the channels (14) in the lower part (16) of the absorber blades.

8. (Amended) A control rod according to [any of claims 1-5] claim 1, **characterized** in that the absorber blades (6, 7, 8, 9) comprise a plurality of channels (22, 23, 24), arranged axially in relation to the control rod, in which the absorber material is arranged, whereby at least the majority of the channels (22) are arranged radially outside one or more channels (23, 24) which are arranged nearest the cruciform centre (10).

11. (Amended) A control rod according to [any of the preceding claims] claim 1, **characterized** in that the absorber material consists of boron and/or hafnium.

12. (Amended) A control rod according to [any of the preceding claims] claim 1, **characterized** in that the absorber material consists of boron carbide and/or hafnium metal.

#### Remarks

Applicants have amended the claims to eliminate multiple dependencies.

Date: June 22, 2001

Respectfully submitted,



Eric J. Franklin, Reg. No. 37,134  
Swidler Berlin Shereff Friedman  
3000 K Street, NW, Suite 300  
Washington, DC 20007  
Telephone: (202) 424-7605

Control rod

## TECHNICAL FIELD

- 5 The present invention relates to a control rod for a boiling water reactor comprising four absorber blades forming an orthogonal cross. The absorber blades contain absorber material distributed in the longitudinal direction, a mean value of the quantity of absorber material per unit of length
- 10 of the control rod being smaller in the upper part of the control rod than in the lower part thereof.

## BACKGROUND ART

- 15 A core in a boiling water reactor normally comprises several hundred fuel assemblies. These are arranged vertically in the core and have an at least substantially square cross section. Each fuel assembly comprises a bundle of fuel rods. In boiling water reactors, fuel bundles containing 8x8,
- 20 9x9 or 10x10 fuel rods are often used. A fuel bundle is surrounded by a fuel channel. The fuel channel is open at both ends so as to allow the coolant of the reactor to flow through the fuel bundle. The core is immersed into water which serves both as coolant and as neutron moderator. Each
- 25 fuel rod contains a large number of fuel pellets stacked on top of each other in a cladding tube.

- A nuclear reactor also comprises a plurality of control rods, the primary task of which is to start, control and shut off
- 30 the power generation by being inserted into and extracted from the reactor core. In the boiling water reactor, the control rods are inserted into the core from below. With the aid of a drive, the control rod may be operated in different positions between a fully extracted and a fully inserted
- 35 position in the core. Certain of the control rods are extracted from the core during operation, whereas others are

inserted to different levels. These levels vary during the operating cycle of the reactor. In the boiling water reactor, the control rods are composed of four vertically arranged elongated absorber blades, which together form an orthogonal cross. The absorber blades are generally of stainless steel and provided with a large number of bored holes or tubes filled with a neutron-absorbing material, for example boron carbide ( $B_4C$ ) or hafnium. The absorber material is usually uniformly distributed in both the axial and radial directions in the absorber blades. The active length of the control rods, that is, the length of that part of the control rod which contains the absorber material, corresponds to the active height of the reactor core when the control rods are fully inserted into the core.

The fuel assemblies are arranged in a regular lattice, where each fuel assembly is included in two rows of fuel assemblies which are perpendicular to each other. The control rods are normally arranged with each one of their absorber blades between two fuel assemblies located in the same row, such that each control rod together with four fuel assemblies arranged around its blades form one unit.

The control rods in the reactor are usually divided into two groups with different tasks. One group of control rods is, during normal operation, fully extracted from the core and used only for stopping and starting the reactor. The other group is used for controlling the reactor power and for burnup compensation during normal reactor operation. The control rods in the second group will hereinafter be referred to as controlling rods. These controlling rods normally constitute less than 10% of all the control rods. At the beginning of an operating cycle, the controlling rods are inserted. By an operating cycle is meant the time between two refuellings. To compensate for the burnup of the fuel, the controlling rods are successively extracted during the

operating cycle. The change of the positions of the controlling rods takes place at certain time intervals, for example once a week. The change may, for example, consist of the controlling rods being extracted about 8% of their  
5 lengths.

Currently, conventional control rods are used, with the absorber material uniformly distributed in the absorber blades, in both groups of control rods. During the time when  
10 the controlling rods are inserted, those fuel pellets which are located adjacent to the absorber blades are protected from burnup of fissile material. This leads to a situation where, each time the controlling rod is extracted a certain distance, fuel pellets containing high contents of fissile  
15 material are exposed, resulting in a considerable increase in power in these fuel pellets. This local increase in power takes place very rapidly. Such stresses may in certain cases cause fuel failure, so-called PCI failure (PCI = pellet-clad interaction), on the cladding tube surrounding the fuel  
20 pellets. The fuel rods which are located nearest the cruciform centre of the controlling rod are particularly subjected to such stresses and hence run the greatest risk of fuel failure. The reason for this is that these fuel rods are protected against burnup of fissile material by two absorber  
25 blades.

From US patent application No. 367 099, a control rod is known which in its upper part is arranged with a smaller percentage of absorber material per unit of length than the  
30 rest of the control rod. In this way, part of the fissile material is burnt up during the time when the control rod is fully inserted into the core and the power increase is not equally great when the controlling rod is extracted. A reduced power increase when the controlling rod is extracted  
35 is achieved by arranging a larger number of bored channels perpendicular to the longitudinal direction of the control



rod and filling them with a neutron-absorbing material, whereby the channels in the upper part of the control rod have a relatively smaller radius, whereby the length of the respective channel is considerably larger than its radius, 5 whereas the other channels have a relatively larger radius.

One disadvantage of the above-mentioned control rod is that the reduction of the power increase obtained when the control rod is extracted is not sufficiently great to eliminate the 10 risk of fuel failure on the most exposed fuel rods, that is the fuel rods situated nearest the cruciform centre of the control rod.

Another disadvantage is that the service life becomes shorter 15 for the above-mentioned control rod than for conventional control rods. The service life of the absorber material, and hence the service life of the control rod, depend on the quantity of absorber material per unit of surface. For a cylindrical channel, the length of which is considerably 20 larger than its radius, the service life of the absorber material is substantially influenced by its radius. A reduction of the diameters of the channels leads to a corresponding reduction of the service life of the control rod.

25 From US patent application No. 659 436, it is known to arrange a smaller quantity of absorber material in that part of the absorber blades which extends along the fuel rods located nearest to the cruciform centre. In their outer part, 30 the blades are provided with a larger number of channels, filled with absorber material, which extend perpendicular to the longitudinal direction of the control rod. In one embodiment, that part of the absorber blades which is located inside the filled channels lacks absorber material. The 35 control rod is provided with recesses, which extend across the fuel rod located nearest the cruciform centre. These

0986988 110801

recesses are filled with moderator such that the consumption of fissile material in adjacent fuel rods increases. By arranging the absorber material in this way, it is possible to considerably extend the duration of an operating cycle for a reactor.

The disadvantage of using such a control rod as a controlling rod is that the risk of fuel failure admittedly has been reduced for the most exposed fuel rods, that is, those located nearest the cruciform centre, but the risk of fuel failure on the other fuel rods is unchanged compared with the risk of fuel failure when using conventional control rods.

#### SUMMARY OF THE INVENTION

The object of the invention is to achieve a control rod for a nuclear reactor which provides a reduced risk of fuel failure when, from an inserted position for a longer period of time, it is extracted from the reactor core in successive steps.

What characterizes a control rod according to the invention will become clear from the appended claims.

A control rod according to the invention has absorber blades which form an orthogonal cross with a central cruciform centre, the capacity of which to absorb neutrons varies both axially and radially. The capacity of the absorber blades to absorb neutrons is lower in their upper part than in their lower part. In the upper part of the absorber blades, the neutron absorption capacity is higher in its outer part than in its inner part which adjoins the cruciform centre. The control rod according to the invention leads to the power reduction for fuel pellets located adjacent to the upper part of the control rod becoming smaller in relation to fuel pellets which are not controlled with respect to fission velocity with the aid of control rods. Especially those fuel

pellets which are located nearest the cruciform centre of the control rod will have a lower power reduction than those fuel pellets which are not controlled with the aid of control rods. When the control rod is extracted somewhat, and the fuel pellets which have been protected by the upper part of the control rod are exposed, the power increase in these fuel pellets will be smaller than for prior art control rods, which is due to the fuel pellets already being burnt up to a certain extent.

10

One advantage of a control rod according to the invention is that the risk of fuel failure on the cladding tube in connection with the control rod being extracted is reduced. Another advantage is that the utilization of the fuel becomes more efficient. An additional advantage is that longer service lives of the control rods are made possible.

15

In a control rod according to the invention, each one of the absorber blades comprises an upper and a lower part, the mean value of the contents of absorber material per unit of length of the control rod being smaller in the upper part of the control rod than in the lower part thereof. The upper part comprises an outer part provided with absorber material and an inner part which lacks absorber material and which is arranged radially inside the outer part.

20

25

To achieve the advantages of the invention, at least some portion of the above-mentioned inner part should constitute at least one-fourth of the width of the absorber blade in the radial direction. In an especially advantageous embodiment, at least some portion of the above-mentioned inner part should constitute at least one-third of the width of the absorber blade in the radial direction. The area, in a section across the longitudinal direction of the control rod, of the above-mentioned inner part should be at least 25% of the area of the upper part. In an especially advantageous

30

35

T03011 33639860

embodiment, the area, in a section across the longitudinal direction of the control rod, of the above-mentioned inner part should be at least 30% of the area of the upper part. The length of the upper part should not exceed one-third of the total length of the absorber blade.

In a preferred embodiment of the invention, recesses in the form of through-holes are arranged in the inner central parts of the upper part of the control rod. This implies that more neutron moderator is supplied to the upper central part of the control rod, which further increases the burnup of fissile material in the fuel rods which are arranged nearest the cruciform centre of the control rod.

#### 15 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows, in a horizontal section, a small part of a reactor core of a boiling water reactor, more specifically a cross section through four fuel assemblies with a control rod placed centrally therebetween.

Figures 2a - 2d show, in vertical sections, different embodiments of a control rod according to the invention.

#### 25 DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 shows a horizontal section through four fuel assemblies 1 with an associated control rod 2 placed therebetween. The section is laid through the upper part of the control rod 2. Each fuel assembly 1 comprises 10x10 fuel rods 3. The fuel rods 3 are enclosed in a fuel channel 4 with a square cross section. Each fuel rod 3 comprises a number of fuel pellets of uranium dioxide stacked on top of each other and enclosed in a cladding tube. The spaces between the fuel rods 3 in the fuel assembly 1 is traversed by water which constitutes both coolant and moderator. Between the fuel

assemblies 1, gaps 5a and 5b are formed which are traversed by water. The control rod 2 is inserted into the gaps 5a and 5b and has four absorber blades 6, 7, 8, 9 which form an orthogonal cross. The cruciform centre of the control rod is designated 10.

Figure 2a shows a vertical section through a control rod 2 according to the invention. The control rod 2 is substantially made of stainless steel and comprises an absorber part 11, which is supported by a vertical coupling bar 12. The control rod 2 comprises an upper part 15 and a lower part 16. The length of the upper part constitutes at most one-third of the total length of the absorber part 11. Two of the four absorber blades 6 and 8 are visible in Figure 2a. Each one of the absorber blades 6, 8 is provided with a large number of bored channels 13, 14 extending perpendicularly to the longitudinal direction of the control rod 2, from the outer edge of the absorber blade 6, 8 and towards the cruciform centre 10. Each channel 13, 14 is filled with an absorber material, for example natural or enriched boron carbide and/or metallic hafnium, gadolinium or erbium, and is hermetically sealed outwards by means of, for example, welding. In the following, these channels will be referred to as absorber channels. The absorber channels 13 which are arranged in the upper part 15 of the absorber blades are considerably shorter than the absorber channels 14 which are arranged in the lower part 16 of the absorber blades. The absorber channels 13 are arranged in an outer part, disposed radially outside an inner part, of the upper part 15 of the absorber blade. The absorber channels 13 each have a length which is at least 30% shorter than the length of one of the absorber channels 14 in the lower part 16.

The absorber channels 13, 14 in the upper part 15 and in the lower part 16 of the absorber blades, respectively, are preferably circularly cylindrical in shape and all have the

same diameters  $d$ . To obtain a maximum service life, the diameters  $d$  of the absorber channels 13, 14 should be the largest possible taking into consideration the thickness of the material of the absorber blades. The service life of the absorber material depends on the quantity of absorber material per unit of surface, described under the background art above. On the other hand, a halving of the length of the absorber channel with a retained diameter  $d$  only has a marginal effect on the service life. In this way, the service life of the control rod is retained in spite of the fact that the percentage of absorber material is reduced in its upper part.

That part of the absorber material which is located inside the absorber channels 13, 14 is provided with recesses 17, 18 in the form of through-holes. In the upper part 15 of the control rod, the recesses 17 are considerably wider in the radial direction than the recesses 18 in the lower part 16 of the control rod. All the recesses have the same extent in the axial direction. It is their respective radial extent that varies. The recesses 17 in the upper part 15 are equally large. When the control rod 2 is inserted into the core, the recesses 17, 18 are filled with moderator, whereby the burnup - due to the good moderation - increases further for the fuel pellets which are to be exposed the next time the control rod 2 is to be extracted somewhat. For guiding the control rod 2 in the relatively narrow gaps 5a, 5b between the fuel assemblies 1, it is provided on top with guide pads 19 in the form of bulges extending outwards from the blade. In addition, the control rod 2 is provided with a handle 20 for handling the control rod during installation and replacement.

The only thing that distinguishes the control rod 2 in Figure 2b from that in Figure 2a is that in the lower part 16, in the vicinity of the coupling bar 12, a recess 21 is arranged which is considerably wider in the radial direction than the other recesses 18 in the lower part 16 and the absorber

channels 14 which have been made correspondingly shorter. One advantage of this embodiment is that a certain increased burnup of the fuel rods 3 nearest the cruciform centre 10 of the control rod 2 is achieved as long as the control rod 2 is fully inserted. Another advantage of this embodiment is that the need of reactivity control in the area around the recess 21 decreases since the core normally has a blanket ion, that is, a region with uranium with low enrichment, at the bottom. An additional advantage with this embodiment is that the saved weight of the control rod 2 may be used for placing more absorber material in a part of the control rod 2 where it is better utilized. The latter is of more importance when a heavy absorber material, such as hafnium, is used.

Figure 2c shows an embodiment of the invention where the recesses 17a, 17b, 17c in the upper part 15 of the control rod successively increase in width and the absorber channels 13a, 13b, 13c successively decrease in length the closer to the top of the control rod that they are arranged. The advantage of the absorber content successively decreasing towards the top of the control rod is that this gives a gradual and more ideal increase of the load on the fuel pellets when the control rod is extracted. The disadvantage of this embodiment is that it is more complicated to manufacture in comparison with the embodiments mentioned above.

Figure 2d shows a control rod 2 where each one of the absorber blades 6, 8 is provided with a large number of channels 22, 23, 24 extending in the longitudinal direction of the control rod from the lower part and up towards the upper part of the control rod 2. The cooling channels 22, 23, 24 are filled with an absorber material. A number of channels 22 are arranged in the outer part of the respective absorber blades 6, 8 and extend along the active length of the control rod. One or more channels 23, 24 are arranged nearest the cruciform centre 10 and are shorter than the channels 22 in

the outer part of the respective absorber blades. In the upper part 15, recesses 17a, 17b, 17c are arranged which are wider than the recesses 18 which are arranged in the lower part 16 of the control rod. The channels 23, 24 nearest the cruciform centre 10 terminate below the wider recesses 17a, 17b, 17c and possibly above the attachment of the coupling bar 12. The absorber channels 22, 23 and 24 are preferably circularly cylindrical in shape and all have the same diameter d.

The control rod 2 according to the invention is suitable to use as a complement to conventional control rods. The control rod according to the invention is especially suitable to use as a controlling rod, for control of reactor power and for burnup compensation (cf. the description under the background art). During a considerable part of the operating cycle, the controlling rods are inserted into the core. To attain the above-mentioned advantages of the invention compared with a conventional control rod, that is, reduced risk of fuel failure on the cladding tube, better utilization of fuel and longer service life of the control rod, it may be sufficient with a small number of control rods according to the invention, for example 4, 8, 12 or 16, depending on the size of the core and the manner of utilizing the control rods. The shutdown margin of a reactor, that is, the inherent negative reactivity of the reactor which causes it to be safely shut down, is deteriorated by control rods which are inserted into the core during operation. Since only a small number of the control rods in the core are of a type according to the invention, the deterioration of the shutdown margin becomes small.



## CLAIMS

1. A control rod (2) for a boiling water reactor comprising four absorber blades (6, 7, 8, 9) forming an orthogonal cross with a cruciform centre (10), where the width of the absorber blades coincides with the radial direction of the control rod and the length of the absorber blades coincides with the axial direction of the control rod, and wherein each one of the absorber blades comprises an absorber material distributed in the longitudinal direction, whereby a mean value of the quantity of absorber material per unit of length of the control rod is smaller in the upper part of the control rod than in the lower part thereof, **characterized** in that each absorber blade in its upper part (15) comprises an inner part arranged radically inside an outer part, where the outer part is provided with the absorber material whereas the inner part lacks absorber material, whereby said inner part, in at least some portion, constitutes at least one-fourth of the width of the absorber blade.
2. A control rod according to claim 1, **characterized** in that the length of the upper part (15) constitutes at most one-third of the length of the absorber blade.
3. A control rod according to claim 1 or 2, **characterized** in that said inner part in at least some portion constitutes at least one-third of the width of the absorber blade.
4. A control rod according to any of the preceding claims, **characterized** in that a plurality of recesses (17, 17a, 17b, 17c, 18) are arranged in said inner part of the absorber blade.
5. A control rod according to claim 4, **characterized** in that a plurality of the recesses (17, 18) are arranged along the cruciform centre (10), whereby the recesses (17) in the

upper part (15) are wider than at least the majority of the recesses (18) in the lower part (16) of the absorber blade.

6. A control rod according to any of the preceding claims,  
5 **characterized** in that the absorber blades comprise a plurality of radially arranged channels (13, 14) in which the absorber material is arranged, whereby at least the majority of the channels (13) in the upper part (15) are shorter than the channels (14) in the lower part (16) of the  
10 absorber blades.

7. A control rod according to claim 6, **characterized** in that the channels (13, 14) in the upper part (15) and the lower  
15 part (16) have a diameter (d) of essentially equal size.

8. A control rod according to any of claims 1-5,  
**characterized** in that the absorber blades (6, 7, 8, 9) comprise a plurality of channels (22, 23, 24), arranged axially in relation to the control rod, in which the  
20 absorber material is arranged, whereby at least the majority of the channels (22) are arranged radially outside one or more channels (23, 24) which are arranged nearest the cruciform centre (10).

9. A control rod according to claim 8, **characterized** in that the channels (23, 24) arranged nearest the cruciform centre (10) are shorter than the channels (22) arranged in outer  
25 part of the absorber blades (6, 7, 8, 9), arranged radially outside said cruciform centre.

30 10. A control rod according to claim 9, **characterized** in that the channels (23, 24) arranged nearest the cruciform centre (10) and the channels (22) arranged in the outer part of the absorber blades (6, 7, 8, 9), arranged radially  
35 outside said cruciform centre, have a diameter (d) of essentially equal size.

11. A control rod according to any of the preceding claims, characterized in that the absorber material consists of boron and/or hafnium.

- 5 12. A control rod according to any of the preceding claims, characterized in that the absorber material consists of boron carbide and/or hafnium metal.

0965988 110501



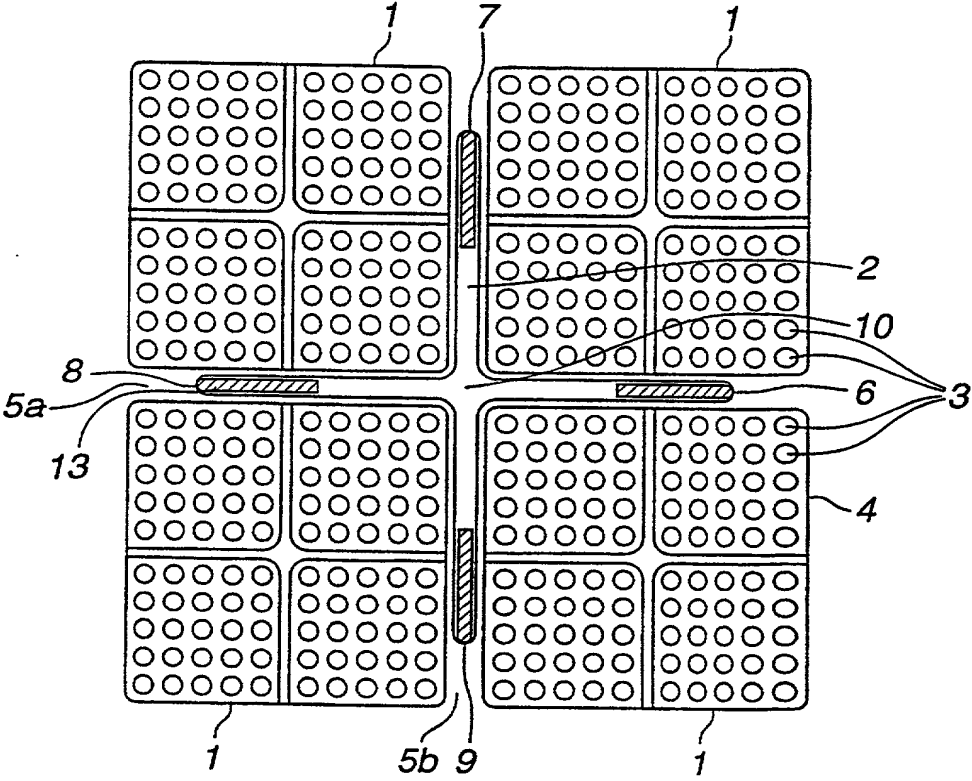


Fig. 1

2/5

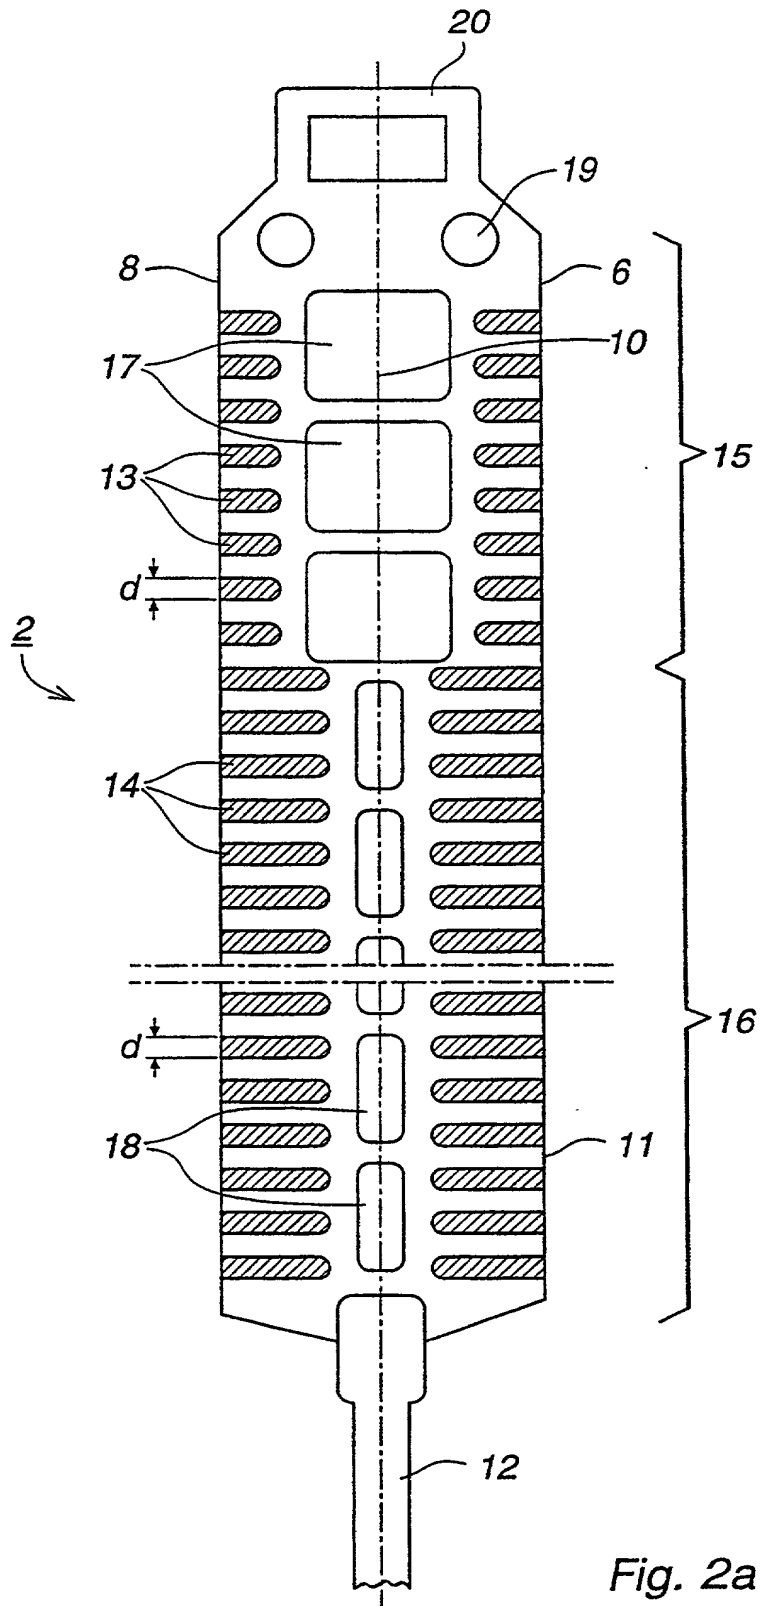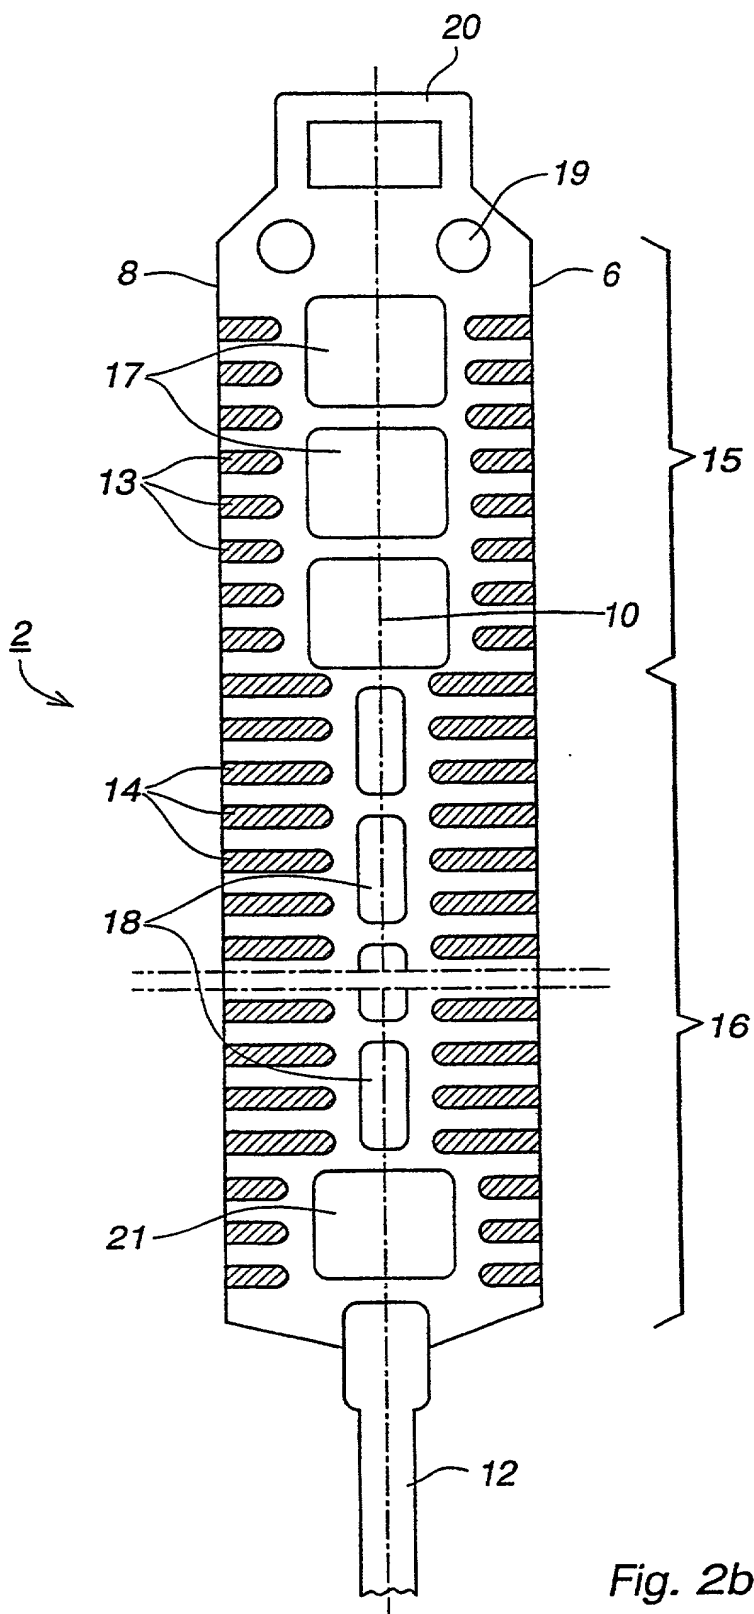

3/5



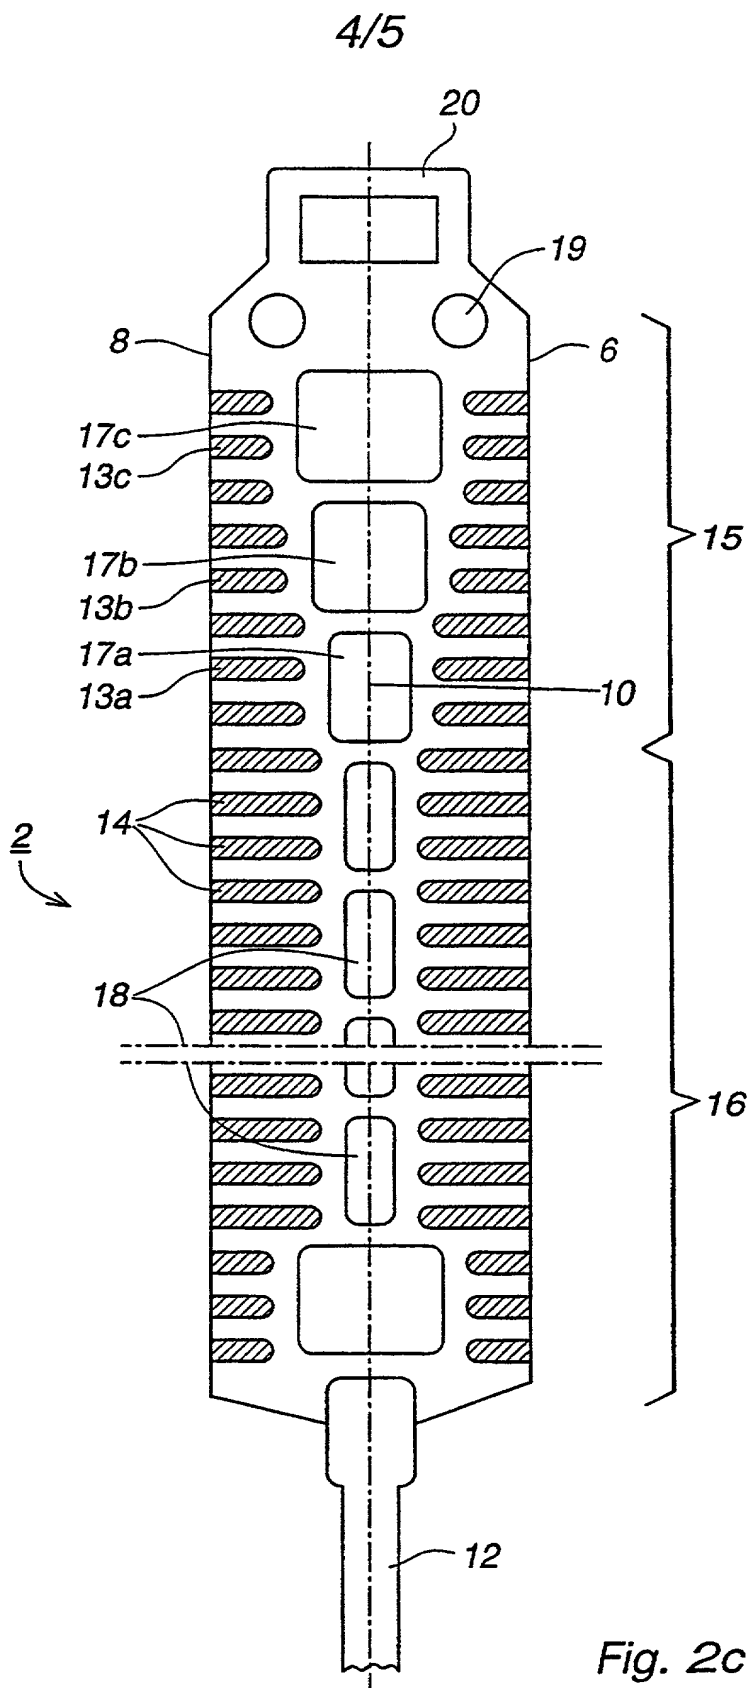


Fig. 2c

5/5

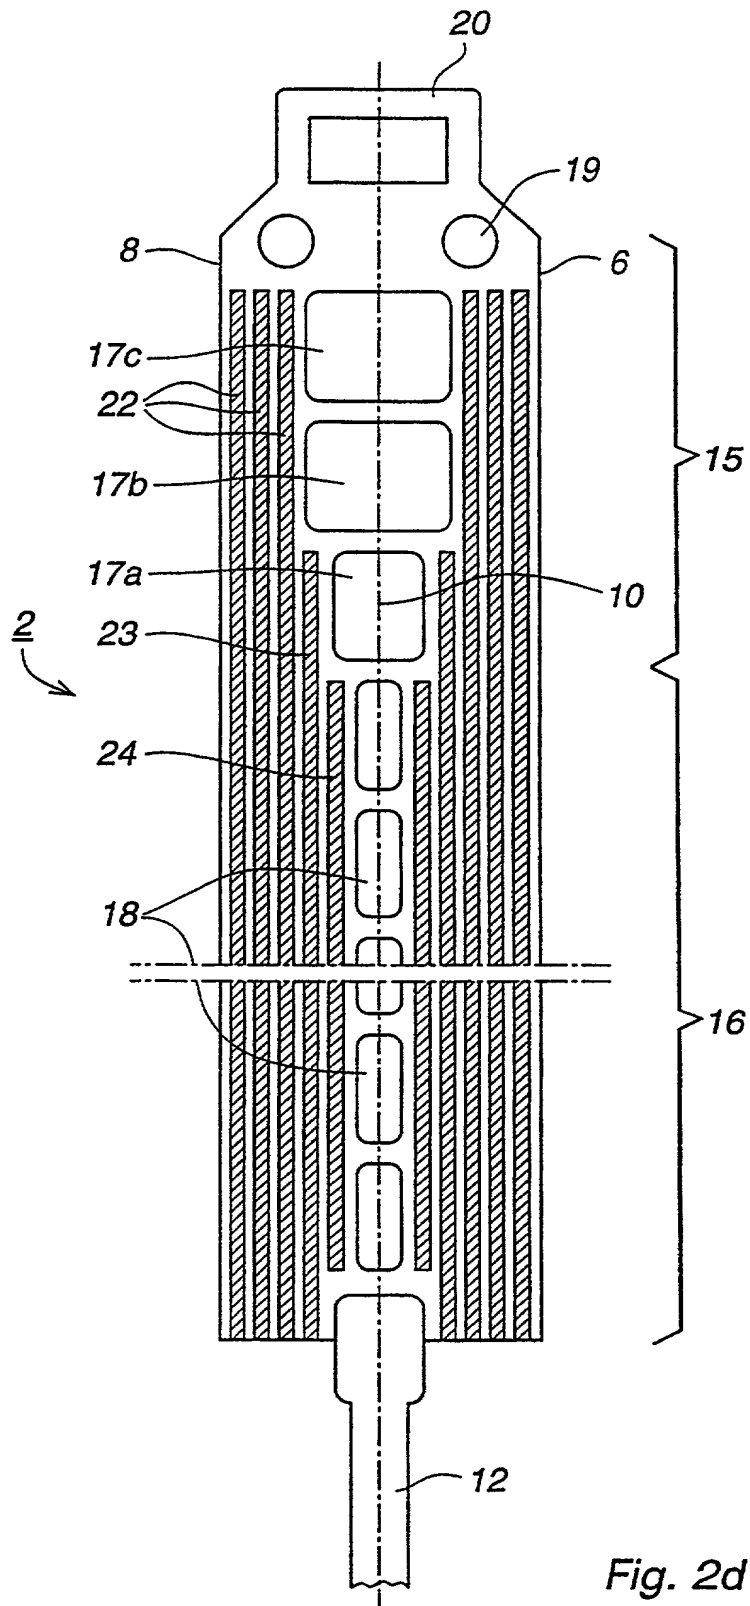


Fig. 2d



**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY**  
(includes Reference to PCT International Applications)

Attorney's docket No.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**CONTROL ROD**

the specification of which (check only one item below):

☐ is attached hereto.

☐ was filed as United States application.

Serial No. \_\_\_\_\_

on \_\_\_\_\_

and was amended

on \_\_\_\_\_ (if applicable).

☒ was filed as PCT international application

Number SE99/02268

on 6 December 1999

and was amended under PCT Article 19

on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

**PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:**

COUNTRY (if PCT indicate PCT)	APPLICATION NO.	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Sweden	9804518-0	23 December 1998	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

**Combined declaration for patent application and power of attorney (continued)**  
(includes Reference to PCT International Applications)

Attorney's docket No

**PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:**

U.S. APPLICATIONS		STATUS (Check one)		
APPLICATION NO.	U.S. FILING DATE	PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.				
APPLICATION NO.	FILING DATE	US SERIAL NO. ASSIGNED (if any)		
SE99/02268	6 December 1999			

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number):  
**Edward A. Pennington (Reg. No. 32,588); John P. Moran (Reg. No. 30,906); Eric J. Franklin (Reg. No. 37,134); Michael A Schwartz (Reg. No. 40,161); Robert C. Bertin (Reg. No. 41,488); Alicia A. Meros (Reg. No. 44,937); Chadwick A. Jackson (Reg. No. 46,495); Edward J. Naidich (Reg. No. 43,826) and Sean O'Hanlon (Reg. No. 47,252)**

Send correspondence to: <b>SWIDLER BERLIN SHEREFF FRIEDMAN, LLP</b> <b>3000 K Street, Suite 300, Washington, D.C. 20007, USA</b>	Telephone : <b>(202) 424-7500</b>
--	--------------------------------------

FULL NAME OF INVENTOR (201) <u>1-00</u>	FAMILY NAME <u>Helmersson</u>	FIRST GIVEN NAME <u>Sture</u>	SECOND GIVEN NAME
RESIDENCE & CITIZENSHIP	CITY <u>Kolbäck</u>	STATE OR FOREIGN COUNTRY <u>Sweden</u> <u>SEX</u>	COUNTRY OF CITIZENSHIP <u>Sweden</u>
POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>Strandvägen 2</u>	CITY <u>Kolbäck</u>	STATE & ZIP CODE/COUNTRY <u>730 40 Sweden</u>
FULL NAME OF INVENTOR (202) <u>2-00</u>	FAMILY NAME <u>Bernander</u>	FIRST GIVEN NAME <u>Örjan</u>	SECOND GIVEN NAME
RESIDENCE & CITIZENSHIP	CITY <u>Västerås</u>	STATE OR FOREIGN COUNTRY <u>Sweden</u> <u>SEX</u>	COUNTRY OF CITIZENSHIP <u>Sweden</u>
POST OFFICE ADDRESS	POST OFFICE ADDRESS <u>Eldstensgatan 6</u>	CITY <u>Västerås</u>	STATE & ZIP CODE/COUNTRY <u>723 53 Sweden</u>

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true: and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 201 <u>[Signature]</u>	SIGNATURE OF INVENTOR 202 <u>[Signature]</u>
DATE <u>July 9, 2001</u>	DATE <u>Aug. 2, 2001</u>